



## Vertiv™ Liebert® GXT5 UPS

750 - 3000VA 230V

Intelligent and Efficient UPS for Protection  
of your Mission-Critical Applications



## *Intelligent and Efficient UPS for Protection of Your Mission-Critical Applications*

**The Vertiv™ Liebert® GXT5 UPS is an online double conversion UPS solution which offers premium power outage protection and continuous power conditioning in a compact and flexible rack/tower form factor.**

The Vertiv Liebert GXT5 single phase UPS operates with high power efficiency, making it ideally suited to protect critical infrastructure in both centralized and edge network applications.

Scalable runtime options with matching external battery cabinets offer additional flexibility when extended uninterrupted power is required. Plus, the Liebert® GXT5 provides battery health status and replacement date prediction for intelligent battery health management.

The UPS system is easy to deploy and maintain due to its user-friendly LCD interface and remote management capabilities supported by the Vertiv™ RDU101 communications card which makes the Liebert GXT5 compatible with infrastructure management solutions such as Vertiv™ LIFE Services, environmental sensors, Vertiv™ Power Insight, and more.

With market leading efficiency and unity power factor operation, the Liebert GXT5 will meet your critical application needs. You can rest assured that your business is protected with this Vertiv solution.

### What's in the box

- Liebert GXT5 UPS
- Quick Installation Guide and Safety Instructions
- USB type A to B cable (2 m)
- RS232 cable (1.8 m)
- Tower Stand and 4-Post Rack Fixed Rail Kit
- 2 x IEC C13 to C14 output cables (2 m) for 750 - 1000 - 1500 VA; 3 cables for 2000 - 3000 VA
- Input power cables (UK, AUS, Schuko) for 2000 - 3000 VA (2.5 m)
- Free [Vertiv Power Assist](#) software for local UPS status and shutdown, or [Vertiv Power Insight](#) for remote network management

## Vertiv Liebert GXT5 Features

### Leading UPS Technology

- High output PF = 1.0
- Full color graphic LCD display with gravity sensing
- Individually programmable outlets for power-cycling hung equipment and to optimize battery runtime for critical applications
- External battery cabinets with auto-detection
- Battery health status and replacement date prediction
- Remote management, update and configuration
- Optimized thermal management and variable speed fan

### Efficient and Green Product

- High efficiency (up to 94%) in online mode
- Even higher efficiency (up to 98%) in ECO mode
- Programmable outlets for scheduled shutdown of equipment that is not in use, resulting in significant power savings
- RoHS and REACH compliance

### Solutions Wide

- Compact Rack / Tower design
- Broad range of services and extended warranties
- Easy to install, configure and operate
- Free Vertiv™ Power Insight management software
- Optional Vertiv RDU101 network card with advanced features for UPS management
- Compatibility with environmental sensors
- Integrated dry-contacts with selectable definition
- Serial port for out-of-band management with Avocent Serial Consoles
- Automatic internal bypass and optional external maintenance bypass

## Vertiv™ Liebert® GXT5 Features



**High power factor (1.0)**  
More usable power enables more connected loads saving space and costs.

**Efficiency (up to 94%) in online mode**

Higher efficiency means an optimized energy management and lower heat dissipation, thus providing energy savings and improved reliability.



**Efficiency (up to 98%) in ECO mode**

Superior protection with maximum efficiency.

**Colored graphic LCD display with gravity orientation**

User friendly interface provides insight to UPS status for easy installation, configuration and operation.



**Compact rack/tower design**

Space-saving UPS provides rack space optimization and flexible installation.



**Battery cabinets with auto-detection**

Be confident your UPS is set up correctly to report available runtime when used with external battery cabinets.



**Comprehensive service offering**

Comprehensive service coverage and a standard 3-years exchange warranty.



## How You Benefit from the Liebert® GXT5 UPS

### Designed for high availability



- With **individually controlled output sockets**, you can manage power to individual devices without impacting other critical network equipment operation
- Minimum downtime of the device provided by **hot-swappable, user-replaceable battery** modules which can be changed during operation
- **Automatic self-test**
- **Extended runtimes** provided by the addition of external battery cabinets
- **Improved battery care** by temperature compensated battery charging
- **Intelligent battery health management** ensures a longer service life (optimized battery maintenance and replacement when needed)

### User-friendly installation and operation



- Easy to read, gravity sensing **graphical color display**
- **Intuitive user interface**, local configuration and management
- Support for the new Vertiv suite of **remote management tools** (Vertiv™ Power Insight, RDU101 network interface card and serial connectivity support)
- **Autodetection of external battery cabinets** enables faster deployment and accurate runtime information
- **Remote UPS firmware upgrade** capability ensures your UPS has the latest features and enhancements

### Optimized energy and capacity management



- ECO operating mode with **up to 98% efficiency**
- **Efficiency** in online double conversion mode up to 94%
- The **higher power factor (1.0)** ensures the connection of more loads and IT equipment
- 4 **individually programmable output sockets** can be used to extend runtime for the most critical loads and smart disconnection of the less critical ones

### Seamless connectivity



- Four onboard, user-definable dry contact I/O for **integration of support management systems**
- Supports **SNMP, web, and environmental sensors** with the optional RDU101 communications card
- **Serial connection** for integration of Avocent® ACS product or direct serial management and control of the UPS

## Technical Specifications

|                | GXT5-750IRT2UXL | GXT5-1000IRT2UXL | GXT5-1500IRT2UXL | GXT5-2000IRT2UXL | GXT5-3000IRT2UXL |
|----------------|-----------------|------------------|------------------|------------------|------------------|
| Ratings (VA/W) | 750VA/750W      | 1000VA/1000W     | 1500VA/1500W     | 2000VA/2000W     | 3000VA/3000W     |

### Dimensions, mm

|                      |                 |                 |                 |                 |                 |
|----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Unit (W x D x H)     | 430 x 400 x 85  | 430 x 400 x 85  | 430 x 470 x 85  | 430 x 470 x 85  | 430 x 540 x 85  |
| Shipping (W x D x H) | 617 x 570 x 262 | 617 x 570 x 262 | 617 x 570 x 262 | 617 x 570 x 262 | 717 x 570 x 262 |

### Weight, kg

|          |      |      |      |      |      |
|----------|------|------|------|------|------|
| Unit     | 16.5 | 16.5 | 21   | 21   | 28.2 |
| Shipping | 21   | 21   | 25.5 | 25.5 | 33   |

### Input AC Parameters

|                                   |               |               |               |               |               |
|-----------------------------------|---------------|---------------|---------------|---------------|---------------|
| Input voltage range (VAC)         | 115-288       | 115-280       | 115-280       | 115-280       | 115-280       |
| Frequency Range (Hz, autosensing) | 40-70         | 40-70         | 40-70         | 40-70         | 40-70         |
| Input Power Connector             | IEC 60320 C14 | IEC 60320 C14 | IEC 60320 C14 | IEC 60320 C20 | IEC 60320 C20 |

### Output AC Parameters

|                                          |                                                                                                  |                                                                                                  |                                                                                                  |                                                                                                  |                                                                                                  |
|------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| Output Receptacles                       | 8 x IEC60320-C13                                                                                 | 8 x IEC60320-C13                                                                                 | 8 x IEC60320-C13                                                                                 | 8 x IEC60320-C13                                                                                 | 6 x IEC60320-C13<br>1 x IEC60320-C19                                                             |
| Output Voltage<br>User selectable output | 200/208/220/230/240VAC<br>(user-configurable); ±3%                                               | 200/208/220/230/240VAC<br>(user-configurable); ±3%                                               | 200/208/220/230/240VAC<br>(user-configurable); ±3%                                               | 200/208/220/230/240VAC<br>(user-configurable); ±3%                                               | 200/208/220/230/240VAC<br>(user-configurable); ±3%                                               |
| Waveform                                 | Pure Sine wave                                                                                   | Pure Sine wave                                                                                   | Pure Sine wave                                                                                   | Pure Sine wave                                                                                   | Pure Sine wave                                                                                   |
| Utility Overload<br>(AC Mode)            | >200% for 250ms;<br>150- 200% for 2 seconds;<br>125- 150% for 50 seconds;<br>105-125% 60 seconds | >200% for 250ms;<br>150- 200% for 2 seconds;<br>125- 150% for 50 seconds;<br>105-125% 60 seconds | >200% for 250ms;<br>150- 200% for 2 seconds;<br>125- 150% for 50 seconds;<br>105-125% 60 seconds | >200% for 250ms;<br>150- 200% for 2 seconds;<br>125- 150% for 50 seconds;<br>105-125% 60 seconds | >200% for 250ms;<br>150- 200% for 2 seconds;<br>125- 150% for 50 seconds;<br>105-125% 60 seconds |

### Battery

|                                            |                                              |                                              |                                              |                                              |                                              |
|--------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
| Type                                       | Valve-regulated,<br>non-spillable, lead acid | Valve-regulated,<br>non-spillable, lead acid | Valve-regulated,<br>non-spillable, lead acid | Valve-regulated,<br>non-spillable, lead acid | Valve-regulated,<br>non-spillable, lead acid |
| Backup Time<br>(100% Load)                 | 10.5 Minutes                                 | 6.8 Minutes                                  | 5.6 Minutes                                  | 3.2 Minutes                                  | 3.3 Minutes                                  |
| Backup Time<br>(50% Load)                  | 25.7 Minutes                                 | 17.8 Minutes                                 | 16.3 Minutes                                 | 10.7 Minutes                                 | 10.8 Minutes                                 |
| +1 External Battery<br>Cabinet (100% Load) | 46.3 Minutes                                 | 33.3 Minutes                                 | 28.2 Minutes                                 | 18.8 Minutes                                 | 19.1 Minutes                                 |
| +1 External Battery<br>Cabinet (50% Load)  | 103.2 Minutes                                | 76.3 Minutes                                 | 70.2 Minutes                                 | 47.1 Minutes                                 | 47.5 Minutes                                 |

### Environmental

|                                              |                                                        |                                                        |                                                        |                                                          |                                                          |
|----------------------------------------------|--------------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------|----------------------------------------------------------|----------------------------------------------------------|
| Operating Temperature, °C                    | 0 to 40                                                | 0 to 40                                                | 0 to 40                                                | 0 to 40                                                  | 0 to 40                                                  |
| Storage Temperature, °C<br>(with batteries)  | -20 to 60<br>(-15 to 40)                               | -20 to 60<br>(-15 to 40)                               | -20 to 60<br>(-15 to 40)                               | -20 to 60<br>(-15 to 40)                                 | -20 to 60<br>(-15 to 40)                                 |
| Relative Humidity                            | 0% to 95%,<br>non-condensing                           | 0% to 95%,<br>non-condensing                           | 0% to 95%,<br>non-condensing                           | 0% to 95%,<br>non-condensing                             | 0% to 95%,<br>non-condensing                             |
| Operating Elevation<br>(m, without derating) | 3,000                                                  | 3,000                                                  | 3,000                                                  | 3,000                                                    | 3,000                                                    |
| Storage Elevation (m)                        | 15,000                                                 | 15,000                                                 | 15,000                                                 | 15,000                                                   | 15,000                                                   |
| Audible Noise                                | <46dBA max at 1m front and sides<br>< 43dBA at 1m rear | <46dBA max at 1m front and sides<br>< 43dBA at 1m rear | <46dBA max at 1m front and sides<br>< 43dBA at 1m rear | <48dBA max at 1m front and side<br><48dBA max at 1m rear | <48dBA max at 1m front and side<br><48dBA max at 1m rear |

### Agency

|                |                                           |                                           |                                           |                                           |                                           |
|----------------|-------------------------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------|
| Compliance     | CE, CB Report, EAC,<br>RCM, UKCA, Morocco | CE, CB Report, EAC,<br>RCM, UKCA, Morocco | CE, CB Report, EAC,<br>RCM, UKCA, Morocco | CE, CB Report, EAC,<br>RCM, UKCA, Morocco | CE, CB Report, EAC,<br>RCM, UKCA, Morocco |
| Safety         | EN 62040-1                                | EN 62040-1                                | EN 62040-1                                | EN 62040-1                                | EN 62040-1                                |
| Surge Immunity | EN 61000-4-5<br>ANSI C62.41 Category B    | EN 61000-4-5<br>ANSI C62.41 Category B    | EN 61000-4-5<br>ANSI C62.41 Category B    | EN 61000-4-5<br>ANSI C62.41 Category B    | EN 61000-4-5<br>ANSI C62.41 Category B    |
| Transportation | ISTA 1A                                   | ISTA 1A                                   | ISTA 1A                                   | ISTA 1A                                   | ISTA 1A                                   |
| Emissions      | IEC/62040-2 Cat. C2                       | IEC/62040-2 Cat. C2                       | IEC/62040-2 Cat. C2                       | IEC/62040-2 Cat. C2                       | IEC/62040-2 Cat. C2                       |
| Environmental  | RoHS2 / REACH / WEEE                      | RoHS2 / REACH / WEEE                      | RoHS2 / REACH / WEEE                      | RoHS2 / REACH / WEEE                      | RoHS2 / REACH / WEEE                      |

### Warranty

|          |         |         |         |         |         |
|----------|---------|---------|---------|---------|---------|
| Warranty | 3 years | 3 years | 3 years | 3 years | 3 years |
|----------|---------|---------|---------|---------|---------|

# Vertiv™ Liebert® GXT5 | 750 - 3000VA 230V UPS

## Accessories and Options

### Vertiv™ Liebert® MicroPOD – Maintenance Bypass and Output Distribution

The Liebert® MicroPOD (Power Output Distribution) is a maintenance bypass option for UPS products, 3kVA and below. It allows removal of the UPS without powering down the connected equipment.



| UPS Model                                               | MicroPOD Model | Input socket | Output receptacles                     |
|---------------------------------------------------------|----------------|--------------|----------------------------------------|
| GXT5-750IRT2UXL<br>GXT5-1000IRT2UXL<br>GXT5-1500IRT2UXL | MP2-210K       | IEC60320-C14 | 8 x IEC60320-C13                       |
| GXT5-2000IRT2UXL                                        | MP2-220K       | IEC60320-C20 | 8 x IEC60320-C13                       |
| GXT5-3000IRT2UXL                                        | MP2-220L       | IEC60320-C20 | 6 x IEC60320-C13 &<br>1 x IEC60320-C19 |

### Network Communication Cards and Environmental Sensors

Optional Intellislot cards are compatible with all Liebert® GXT5 systems.



|                        |              |                                                                                                   |
|------------------------|--------------|---------------------------------------------------------------------------------------------------|
| Network Communications | RDU101       | Intellislot network card for SNMP and web management, plus SN series environmental sensor support |
|                        | RELAYCARD-PG | Intellislot Relay Card                                                                            |
| Environmental Sensors  | USB485I      | USB to RS-485 adapter for Modbus/RTU and BACnet/MSTP support                                      |
|                        | SN-T         | Modular with single temperature sensor                                                            |
|                        | SN-TH        | Modular with single temperature and humidity sensor                                               |
|                        | SN-2D        | Modular with two door contact inputs                                                              |
|                        | SN-3C        | Modular with three dry-contact inputs                                                             |
|                        | SN-Z01       | Integrated cable with single temperature sensors                                                  |
|                        | SN-Z02       | Integrated cable with three temperature sensors                                                   |
|                        | SN-Z03       | Integrated cable with three temperature sensors & 1 humidity sensor                               |

### External Battery Cabinets

| UPS Model        | External battery cabinet |
|------------------|--------------------------|
| GXT5-750IRT2UXL  | GXT5-EBC36VRT2U          |
| GXT5-1000IRT2UXL | GXT5-EBC36VRT2U          |
| GXT5-1500IRT2UXL | GXT5-EBC48VRT2U          |
| GXT5-2000IRT2UXL | GXT5-EBC48VRT2U          |
| GXT5-3000IRT2UXL | GXT5-EBC72VRT2U          |



### Internal Battery Replacement Kits

| UPS Model        | Battery replacement kit |
|------------------|-------------------------|
| GXT5-750IRT2UXL  | GXT5-36VBATKIT          |
| GXT5-1000IRT2UXL | GXT5-36VBATKIT          |
| GXT5-1500IRT2UXL | GXT5-48VBATKIT          |
| GXT5-2000IRT2UXL | GXT5-48VBATKIT          |
| GXT5-3000IRT2UXL | GXT5-72VBATKIT          |

## Installation

| Railkit    | UPS                                                                                                           |
|------------|---------------------------------------------------------------------------------------------------------------|
| RMKIT18-32 | All GXT5 battery modules as well as all GXT5 750 thru 3000VA models (racks with 18" - 32" deep support rails) |





## Comprehensive Services for Critical Systems

### Power Emergency Package

The Power Emergency Package provides emergency support with 100% parts coverage and is available for single-phase UPS products up to 3kVA. Adding Vertiv services to your Liebert GXT5 ensures you are protected during an emergency.

- Five years service coverage
- 24x7 professional Helpline
- Advanced replacement of the faulty unit
- Shipping costs covered by Vertiv
- Coverage for both electronic parts and battery failures
- The Power Emergency Premier version also provides remote diagnostic and preventive monitoring with Vertiv™ LIFE™ Services, enabled via the optional Liebert® Intellislot RDU101 Card

### Installation and Start-up Services

Installation and Start-up Services provide on-site technical support for installation and start-up of your UPS or battery cabinet, ensuring you get up and running as quickly as possible:

- Installation for 3kVA models includes mounting the new UPS and battery cabinets in 8x5 (PS-RUPS-INSTL85-006) or 24x7 (PS-RUPS-INSTL247-006)
- Start-up available for 3kVA models in 2 scheduling options, in 8x5 (PS-RUPS-ST85-006) or 24x7 (PS-RUPS-ST247-006)
- Services performed by a Vertiv factory trained technician

### Power Emergency and Warranty Extensions

| UPS                                  | Power Emergency | Power Emergency Premier | Warranty Extension +1 year | Warranty Extension +2 years | Warranty Extension +3 years |
|--------------------------------------|-----------------|-------------------------|----------------------------|-----------------------------|-----------------------------|
| GXT5-750IRT2UXL<br>GXT5-1000IRT2UXL  | RUPS-PE5-004    | -                       | RUPS-WE1-004               | RUPS-WE2-004                | RUPS-WE3-004                |
| GXT5-1500IRT2UXL<br>GXT5-2000IRT2UXL | RUPS-PE5-005    | -                       | RUPS-WE1-005               | RUPS-WE2-005                | RUPS-WE3-005                |
| GXT5-3000IRT2UXL                     | RUPS-PE5-006    | RUPS-PEP5-006           | RUPS-WE1-006               | RUPS-WE2-006                | RUPS-WE3-006                |

Note: Service offerings are available only in select countries, please check with your Vertiv representative if yours is included. Timing may vary depending on local country public holidays and other considerations. Please refer to the appropriate Scope of Work for additional details.

## Build Your Total Infrastructure Solution with Vertiv

*Discover expert designed IT infrastructure solutions with proven success in diverse environments and countless applications.*

#### Vertiv™ Geist™ rPDU


Reliable power distribution with outlet level remote monitoring and management providing the highest level of power visibility and control.

#### Vertiv™ VR Rack

Self-contained 42U server rack designed to simplify equipment installation and provides an additional 6cm of useable depth.

#### Vertiv™ VRC

Keep critical IT equipment cool with a dedicated high-efficiency rack-mount cooling system with scalable capacity.

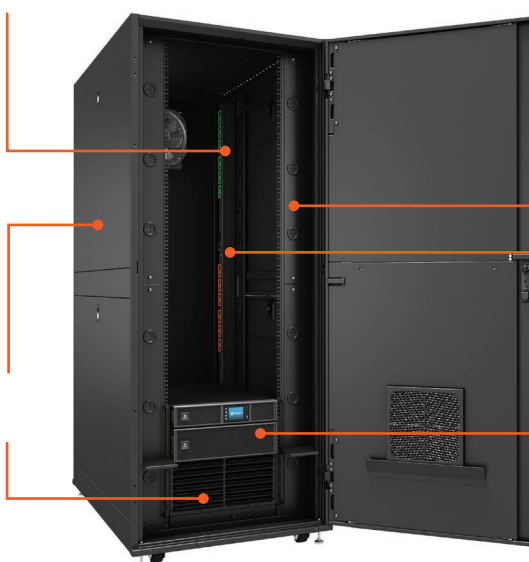

#### Cable and Air Flow Management

Included accessories ensure proper cable management and airflow to keep your equipment cool.

#### Software and IT Management

Monitor the entire system either locally or remotely to ensure you are alerted of out-of-range conditions that could result in costly downtime.

#### Liebert® GXT5

Protect mission critical equipment in the event of power loss or extreme power fluctuations.

Visit [Vertiv.com](https://www.vertiv.com) or contact a Vertiv Sales Representative today to find out how Vertiv can help you configure an all-in-one infrastructure solution.

